




# Gateway ID49C07U RAM Replacement

Written By: Patrick McGrail



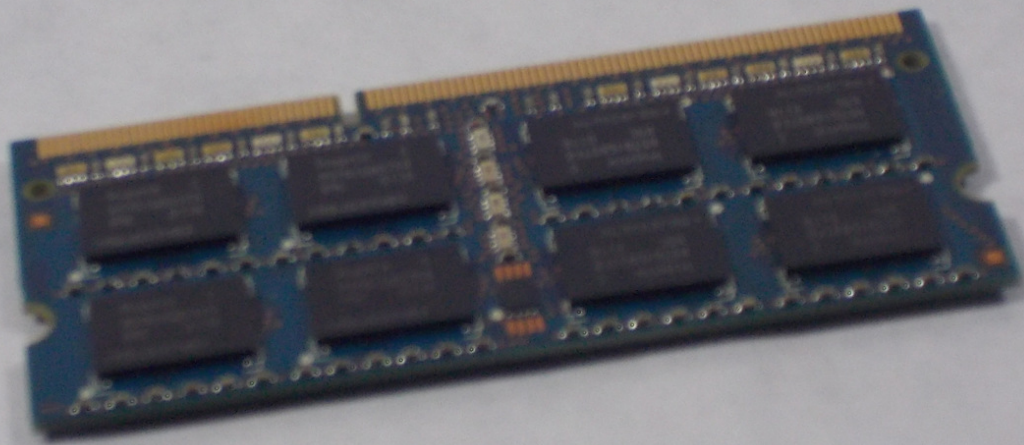

## TOOLS:

- [JIS Driver Set](#) (1)
-

## Step 1 — Battery



- Turn the laptop over so the bottom of the device is facing upwards with the hinge facing away from you.

## Step 2



- Locate the switch on the top left of the laptop labeled with a padlock symbol.
- Flip the switch in the direction of the unlocked padlock symbol.



### Step 3



- Locate the switch that releases the battery and slide it to the right.

### Step 4



- While holding the release switch to the right, pull the battery away from you.

## Step 5 — RAM



- Locate two screws securing back panel
- Unscrew both



## Step 6



- Remove plate from device




## Step 7

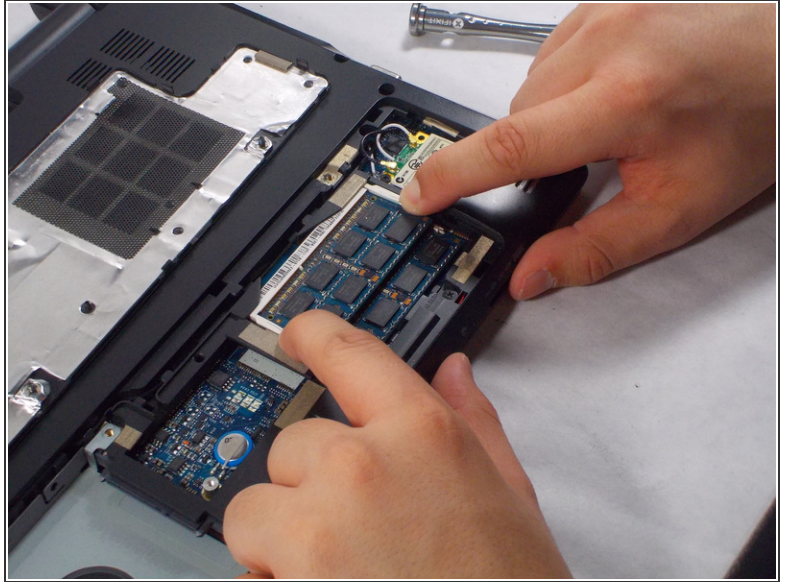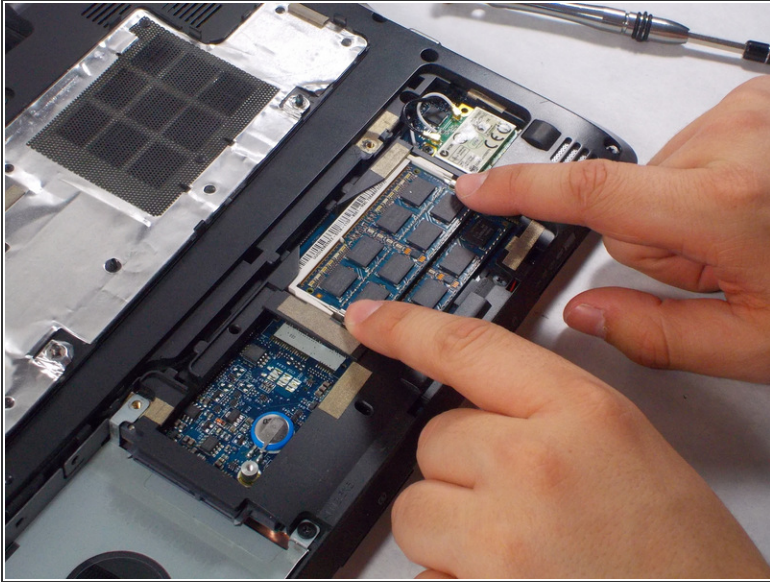

- Locate RAM
- Push tabs apart to release memory

## Step 8

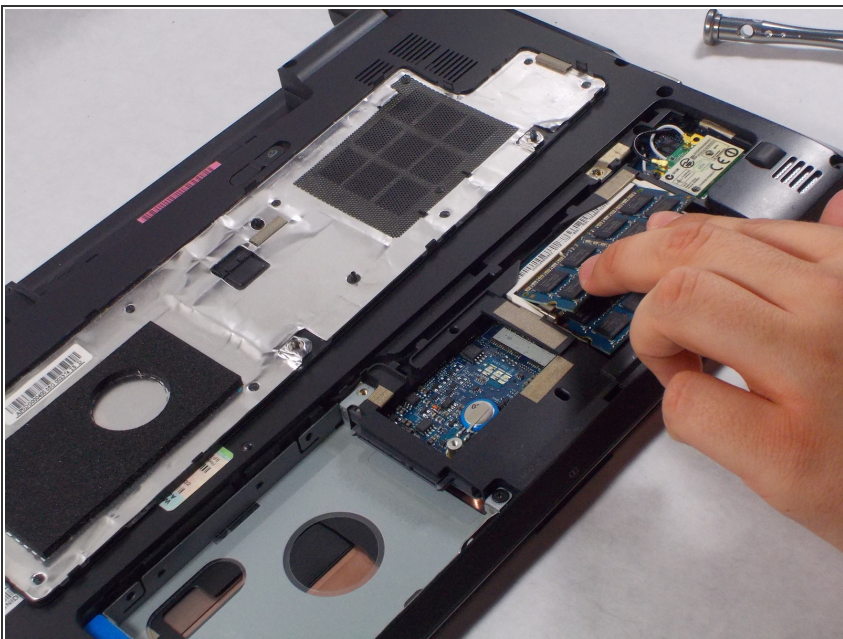

- Pull out memory

To reassemble your device, follow these instructions in reverse order.

